DISPLAY FREEZER (0°F)

Model: 1FNGDHD

Natural Refrigerant R-290 Model

1-Section Display Reach-In Freezer with Half Hinged Glass Doors

1FNGDHD - Stainless steel front, aluminum end panels and interior **1FNSAGDHD** - Stainless steel exterior, aluminum interior **1FNSSGDHD** - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Special electrical requirements (consult factory)	
Additonal epoxy coated steel shelves	Shallow depth (consult factory)	
Chrome or stainless steel shelves	Solid door (consult factory)	
Heavy duty pilaster strips	Full door	
Wine rack	Rehinging of doors (consult factory)	
Adjustable legs	Pass thru (consult factory)	
Pan slide assemblies		

Consult factory for other model configurations, options and accessories.





Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	
AIA #:	SIS #:	

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, electric condensate evaporator

Expansion valve system

Standard operating temperature is 0 to -5°F and can be adjusted to operate as low as -10°F in a 90°F ambient.

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Triple-pane, tempered hinged glass doors

Chrome plated door handles

Cam action, lift-off hinges Self-closing doors

Magnetic snap in door gaskets

Cylinder lock in each door

Heavy duty, epoxy coated steel shelves

5" casters

MODEL FEATURES

LED interior lighting

Electronic control, automatic electric defrost


¹ R-290 refrigerant meets all federal and state regulatory requirements.


APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cubic feet)	20 (566 cu l)
Width, Overall (inches)	26 (660 mm)
Depth, Overall (inches) (including handles)	35 3/8 (899 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	55 1/2 (1410 mm)
Clear Door Width (inches)	19 3/8 (492 mm)
Clear Half Door Height (inches)	27 1/2 (699 mm)
Height, Overall (inches) (including 5" casters)	82 1/4 (2089 mm)
Number of Doors	2
Number of Shelves	4
Shelf Area (square feet)	20.4 (1.9 sq m)
Tray Slide Capacity (per half section) (2" centers)	11
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/2
Capacity (BTU per hour)*	2470
* Rating @ -15°F evaporator, 90°F ambient ELECTRICAL DATA	
Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	8.2 (5.8)
Defrost Amps (International)	4.4 (3.2)
10 ft. Cord/Plug [attached] (International)	Yes (No)
SHIPPING DATA	
Height - Crated (inches)	85 1/2 (2172 mm)
Width - Crated (inches)	31 5/8 (803 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	65 (1841 cu l)
Weight Std - Crated (pounds)	328 (149 kg)
Weight SS - Crated (pounds)	394 (179 kg)
Figures in parentheses reflect metric equivalents rounded to the nearest	

Model Plan Views

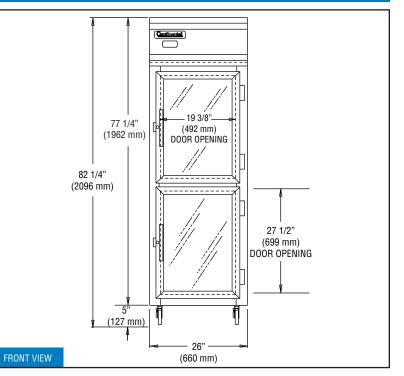

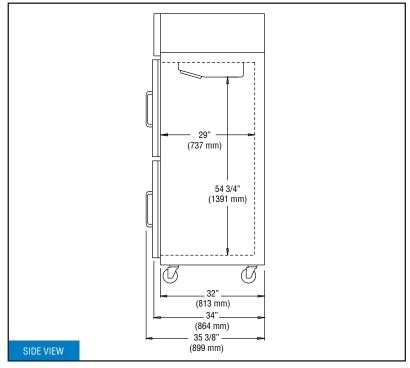

Equipped with one NEMA-5-15P Plug (varies by country)

whole unit.



Due to our continued efforts in developing innovative products, specifications subject to change without notice.





Toll-Free: 800-523-7138 Phone: 215-244-1400

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Fax: 215-244-9579

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.

© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.