

# REACH-IN REFRIGERATOR

## Model: 1RSEN

Natural Refrigerant R-290 Model

### 1-Section Slim Line Reach-In Refrigerator

**1RSEN** - Stainless steel front, aluminum end panels and interior  
**1RSENSA** - Stainless steel exterior, aluminum interior  
**1RSENSS** - Stainless steel exterior and interior  
**Designed to maintain NSF-7 temperatures in 100°F ambient.**



## Options and Accessories

(upcharge and lead times may apply)

|   |  |
|---|--|
| Stainless steel case back                         | Shallow depth (consult factory)  |
| Additional epoxy coated steel shelves             | Hinged glass door (consult factory)  |
| Chrome or stainless steel shelves                 | Half doors (consult factory)   |
| Adjustable legs                                   | <b>Correctional Facility Options</b>   |
| Custom laminates                                  | <ul style="list-style-type: none"> <li>One way security screws</li> </ul>                              |
| Expansion valve                                   | <ul style="list-style-type: none"> <li>Locking hasp (lock not included)</li> </ul>                     |
| Special electrical requirements (consult factory) | <ul style="list-style-type: none"> <li>Stainless steel mesh cover</li> <li>Coverless hinges</li> </ul> |

Consult factory for other model configurations, options and accessories.

**Continental**<sup>®</sup>  
Refrigerator



Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

## Standard Model Features

### REFRIGERATION SYSTEM

Self contained, performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Automatic, electric condensate evaporator

### CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handle

Cam action, lift off hinges

Self-closing door

Magnetic snap in Santoprene™ door gasket

Cylinder lock in door

Heavy duty, epoxy coated steel shelves

Heavy duty pilaster strips

5" casters

### MODEL FEATURES

LED interior lighting

Electronic control, off-cycle defrost

Will accommodate 12 x 20 pans

Rehinging of door (in the field)

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

# Model Specifications

## DIMENSIONAL DATA

|  |                  |
|--|------------------|
| Net Capacity (cubic feet)                          | 15 (425 cu l)    |
| Width, Overall (inches)                            | 17 3/4 (451 mm)  |
| Depth, Overall (inches)<br>(including handle)      | 35 3/8 (899 mm)  |
| Depth (inches) (less door)                         | 32 (813 mm)      |
| Depth (inches) (door open 90°)                     | 47 3/8 (1203 mm) |
| Clear Door Width (inches)                          | 13 1/8 (333 mm)  |
| Clear Door Height (inches)                         | 60 5/8 (1540 mm) |
| Height, Overall (inches)<br>(including 5" casters) | 82 1/4 (2089 mm) |
| Number of Doors                                    | 1                |
| Number of Shelves                                  | 5                |
| Shelf Area (square feet)                           | 9.3 (0.9 sq m)   |

## REFRIGERANT DATA

|                             |      |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/4+ |
| Capacity (BTU per hour)*    | 1940 |

## ELECTRICAL DATA

|  |                     |
|--|---------------------|
| Voltage (International)                        | 115/60/1 (220/50/1) |
| Feed Wires (including ground)                  | 3                   |
| Total Amps (International)                     | 5.9 (3.9)           |
| 10 ft. Cord/Plug [attached]<br>(International) | Yes<br>(No)         |

## SHIPPING DATA



|                              |                  |
|------------------------------|------------------|
| Height - Crated (inches)     | 85 1/2 (2172 mm) |
| Width - Crated (inches)      | 32 (813 mm)      |
| Depth - Crated (inches)      | 42 (1067 mm)     |
| Volume - Crated (cubic feet) | 65 (1841 cu l)   |
| Weight Std - Crated (pounds) | 290 (132 kg)     |
| Weight SS - Crated (pounds)  | 348 (158 kg)     |

\* Rating @ +25°F evaporator, 90°F ambient  
 Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
 (varies by country)

# Model Plan Views

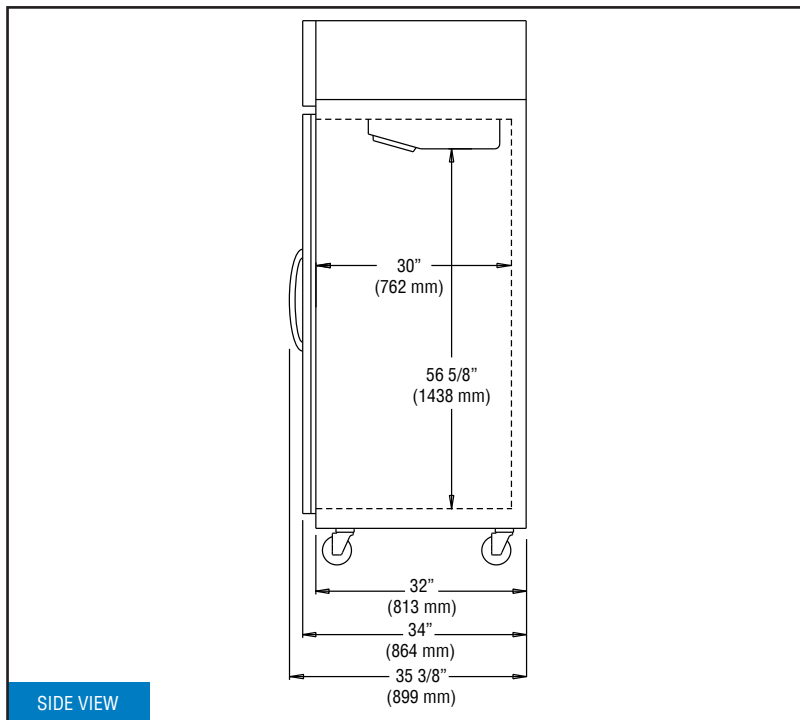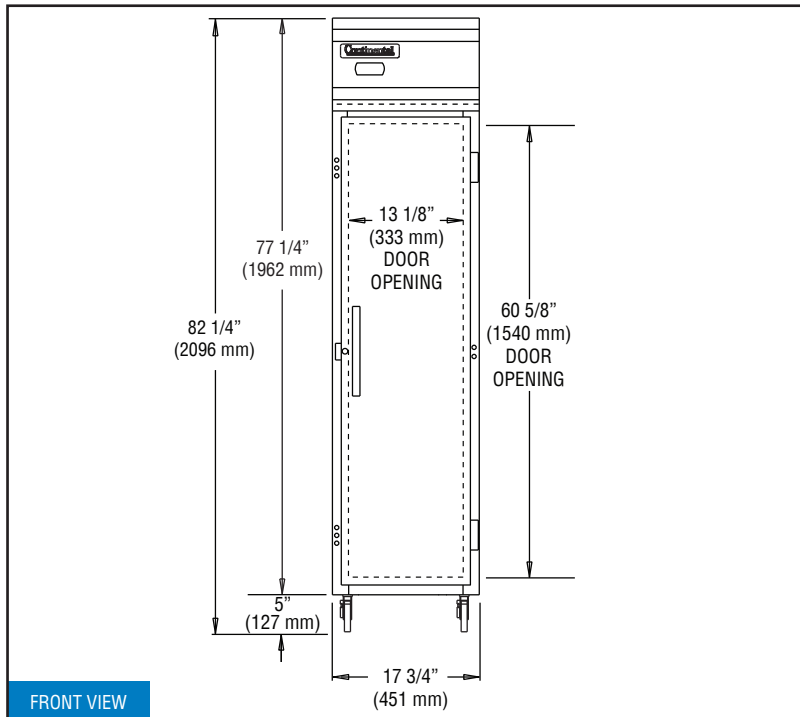

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.



Toll-Free: 800-523-7138  
 Phone: 215-244-1400  
 Fax: 215-244-9579

539 Dunksferry Road  
 Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



PROUDLY  
 DESIGNED & ASSEMBLED  
 IN THE U.S.A.