

REACH-IN REFRIGERATOR

Model: 1RSNHD

Natural Refrigerant R-290 Model

1-Section Reach-In Refrigerator Shallow Depth with Half Doors

1RSNHD - Stainless steel front, aluminum end panels and interior
1RSNSAHD - Stainless steel exterior, aluminum interior
1RSNSSHD - Stainless steel exterior and interior
Designed to maintain NSF-7 temperatures in 100°F ambient.



Options and Accessories

(upcharge and lead times may apply)

| | |
|---|--|
| Stainless steel case back | Standard depth (consult factory) |
| Additional epoxy coated steel shelves | Hinged glass door (consult factory) |
| Chrome or stainless steel shelves | Full door (consult factory) |
| Heavy duty pilaster strips | Rehinging of doors (consult factory) |
| Wine rack | Correctional Facility Options |
| Adjustable legs | <ul style="list-style-type: none"> One way security screws |
| Custom laminates | <ul style="list-style-type: none"> Locking hasp (lock not included) |
| Expansion valve | <ul style="list-style-type: none"> Stainless steel mesh cover |
| Special electrical requirements (consult factory) | <ul style="list-style-type: none"> Coverless hinges |

Consult factory for other model configurations, options and accessories.

Continental
Refrigerator



Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, electric condensate evaporator

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handle

Cam action, lift off hinges

Self-closing doors

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty, epoxy coated steel shelves

5" casters

MODEL FEATURES

LED interior lighting

Electronic control, off-cycle defrost

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA

| | |
|--|------------------|
| Net Capacity (cubic feet) | 16 (453 cu l) |
| Width, Overall (inches) | 26 (660 mm) |
| Depth, Overall (inches) (including handle) | 29 1/4 (743 mm) |
| Depth (inches) (less door) | 25 7/8 (657 mm) |
| Depth (inches) (door open 90°) | 49 1/2 (1257 mm) |
| Clear Door Width (inches) | 19 3/8 (492 mm) |
| Clear Half Door Height (inches) | 27 1/2 (699 mm) |
| Height, Overall (inches) (including 5" casters) | 82 1/4 (2089 mm) |
| Number of Doors | 2 |
| Number of Shelves | 3 |
| Shelf Area (square feet) | 20.4 (1.9 sq m) |

REFRIGERANT DATA

| | |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/4+ |
| Capacity (BTU per hour)* | 1940 |

ELECTRICAL DATA

| | |
|--|---------------------|
| Voltage (International) | 115/60/1 (220/50/1) |
| Feed Wires (including ground) | 3 |
| Total Amps (International) | 5.9 (3.9) |
| 10 ft. Cord/Plug [attached] (International) | Yes (No) |

SHIPPING DATA



| | |
|------------------------------|------------------|
| Height - Crated (inches) | 85 1/2 (2172 mm) |
| Width - Crated (inches) | 31 5/8 (803 mm) |
| Depth - Crated (inches) | 42 (1067 mm) |
| Volume - Crated (cubic feet) | 65 (1841 cu l) |
| Weight Std - Crated (pounds) | 273 (124 kg) |
| Weight SS - Crated (pounds) | 328 (149 kg) |

* Rating @ +25°F evaporator, 90°F ambient
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug
(varies by country)

Model Plan Views

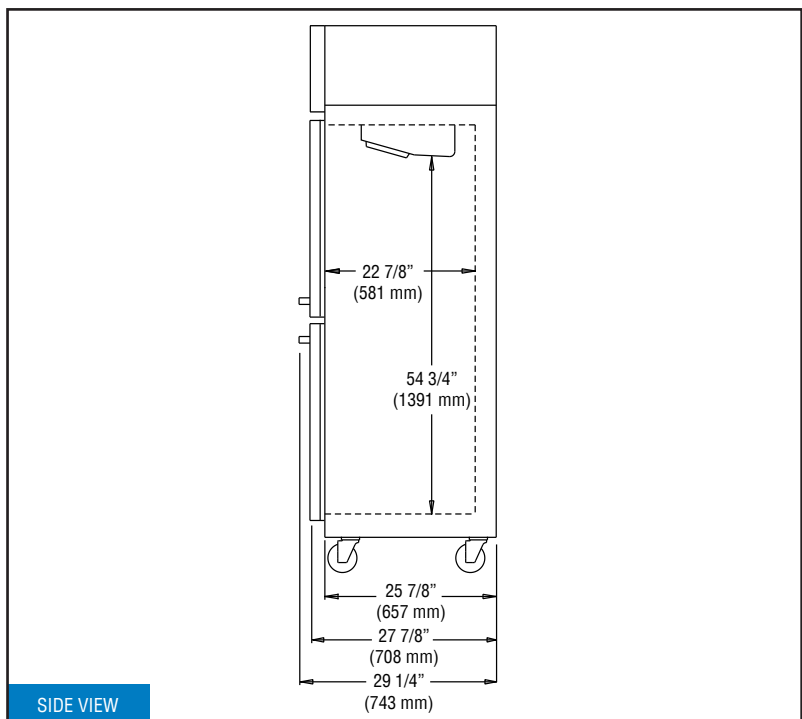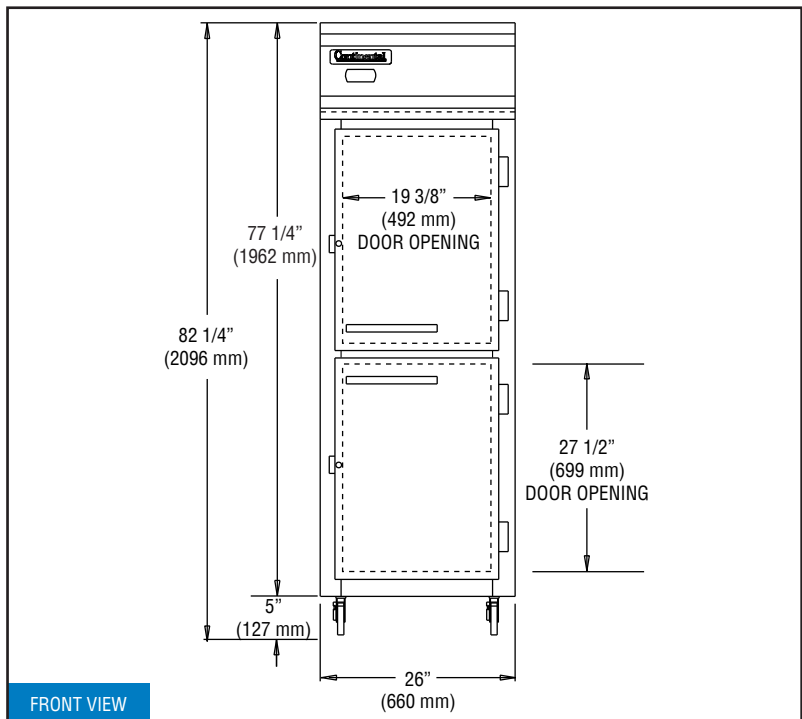

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



PROUDLY
DESIGNED & ASSEMBLED
IN THE U.S.A.