# DISPLAY FREEZER (0°F)

### **Model: 3FENGD**

Natural Refrigerant R-290 Model

# 3-Section Extra-Wide Display Reach-In Freezer with Hinged Glass Door

3FENGD - Stainless steel front, aluminum end panels and interior

3FENSAGD - Stainless steel exterior, aluminum interior

3FENSSGD - Stainless steel exterior and interior



### **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel case back	Special electrical requirements (consult factory)
Additional epoxy coated steel shelves	Shallow depth (consult factory)
Chrome or stainless steel shelves	Solid door (consult factory)
Heavy duty pilaster strips	Half doors
Wine rack	Rehinging of doors (consult factory)
Adjustable legs	
Universal Pan Slides	

Consult factory for other model configurations, options and accessories.





Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #-	SIS #·

## **Standard Model Features**

#### **REFRIGERATION SYSTEM**

Self contained, performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Automatic, electric condensate evaporator

Expansion valve system

Standard operating temperature is 0 to -5°F and can be adjusted to operate as low as -10°F in a 90°F ambient.

#### **CABINET ARCHITECTURE**

3" non-CFC polyurethane foam insulation

Triple-pane, tempered hinged glass door

Chrome plated door handle

Cam action, lift-off hinges

Self-closing door

Magnetic snap in door gasket

Cylinder lock in door

Heavy duty, epoxy coated steel shelves

5" casters

#### **MODEL FEATURES**

LED interior lighting

Electronic control, automatic electric defrost

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

# **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cubic feet)	73 (2067 cu I)
Width, Overall (inches)	85 1/2 (2172 mm)
Depth, Overall (inches) (including handle)	35 3/8 (899 mm)
Depth (inches) (less door)	32 (813 mm)
Depth (inches) (door open 90°)	58 (1473 mm)
Clear Door Width (inches)	21 7/8 (556 mm)
Clear Door Height (inches)	58 5/8 (1489 mm)
Height, Overall (inches) (including 5" casters)	85 3/4 (2178 mm)
Number of Doors	3
Number of Shelves	12

#### **REFRIGERANT DATA**

Shelf Area (square feet)

Condensing Unit Size (H.P.)	1 1/4	
Capacity (BTU per hour)*	6050	

61.2 (5.7 sq m)

24

\* Rating @ -15°F evaporator, 90°F ambient

Tray Slide Capacity (2" Centers)

#### **ELECTRICAL DATA**


Voltage (International)	115/208-230/60/1 (220/50/1)
Feed Wires (including ground)	4
Total Amps (International)	13.1 (6.3)
Defrost Amps (International)	6.1 (3.1)
10 ft. Cord/Plug [attached] (International)	Yes (No)


#### **SHIPPING DATA**

Height - Crated (inches)	85 1/2 (2172 mm)
Width - Crated (inches)	90 (2286 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	187 (3766 cu I)
Weight Std - Crated (pounds)	790 (362 kg)
Weight SS - Crated (pounds)	945 (430 kg)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit

## **Model Plan Views**

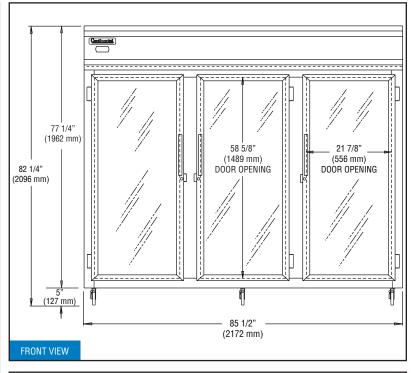

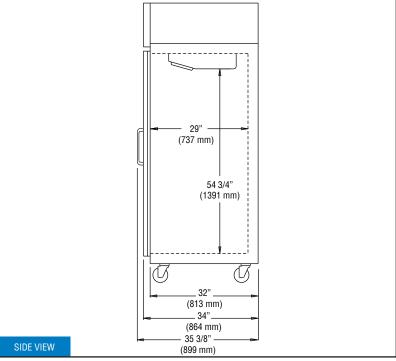

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.







© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.



Equipped with one NEMA L14-20P plug (varies by country)