

DESIGNER LINE SLIM LINE FREEZER (0°F)

Model: D1FSEN



1-Section Slim Line Reach-In Freezer

D1FSEN - Stainless steel front, aluminum end panels and interior
D1FSENSA - Stainless steel exterior, aluminum interior
D1FSENSS - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Correctional Facility Options
Additional epoxy coated steel shelves	• One way security screws
Chrome or stainless steel shelves	• Locking hasp (lock not included)
Caster options	• Stainless steel mesh cover
Custom laminates	• Coverless hinges
	Special electrical requirements (consult factory)

Consult factory for other model configurations, options and accessories.



Project Name:

Model Specified:

Location:

Item No: **Quantity:**

AIA #: **SIS #:**

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated refrigeration system (coil in food zone)
 Natural, environmentally safe, high efficiency R-290 refrigerant¹
 Automatic, hot gas condensate evaporator
 Expansion valve system
 Standard operating temperature is 0 to -5°F and can be adjusted to operate as low as -10°F in a 90°F ambient.

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation
 Smooth, polished chrome workflow door handle
 Cam action, lift off hinges
 Self-closing door
 Magnetic snap-in Santoprene™ door gasket
 Cylinder lock in door
 Heavy duty pilaster strips
 Heavy duty, epoxy coated steel shelves
 Adjustable 6" stainless steel legs

MODEL FEATURES

LED interior lighting
 Electronic control, automatic electric defrost
 Will accommodate 12 x 20 pans
 Rehinging of door (in the field)

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

DIMENSIONAL DATA

Net Capacity (cubic feet)	15 (425 cu l)
Width, Overall (inches)	17 3/4 (451 mm)
Depth, Overall (inches) (including handle)	35 3/8 (899 mm)
Depth (inches) (less door)	32 (813 mm)
Depth (inches) (door open 90°)	49 1/2 (1257 mm)
Clear Door Width (inches)	13 1/8 (333 mm)
Clear Door Height (inches)	60 5/8 (1540 mm)
Height, Overall (inches) (including 6" legs)	83 1/4 (2115 mm)
Number of Doors	1
Number of Shelves	3
Shelf Area (square feet)	9.3 (.9 sq m)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/2
Capacity (BTU per hour)*	1590

* Rating @ -15°F evaporator, 90°F ambient

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	7.6 (4.2)
Defrost Amps (International)	4.2 (4.2)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA


Height - Crated (inches)	85 1/2 (2172 mm)
Width - Crated (inches)	32 (813 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	65 (1841 cu l)
Weight Std - Crated (pounds)	320 (146 kg)
Weight SS - Crated (pounds)	380 (173 kg)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.




Equipped with one NEMA-5-15P Plug
(varies by country)

Model Plan Views

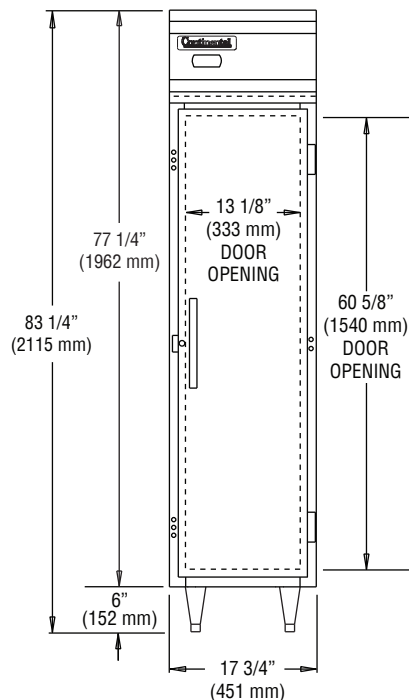

FRONT VIEW

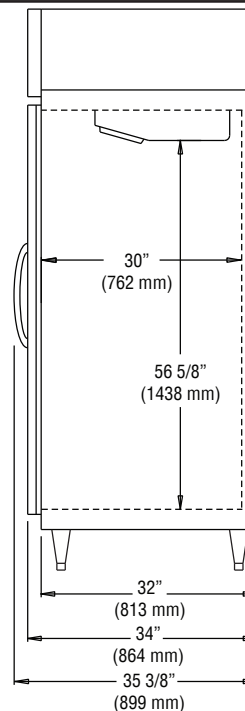

SIDE VIEW

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.

Continental
Refrigerator

Toll-Free: 800-523-7138
Phone: 215-244-1400
Fax: 215-244-9579

539 Dunksferry Road
Bensalem, PA 19020
www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



PROUDLY
DESIGNED & ASSEMBLED
IN THE U.S.A.