DESIGNER LINE REFRIGERATOR/FREEZER



1-Section Dual Temp Extra-Wide Over/Under Reach-In Refrigerator/Freezer (0°F)

Model: D1RFENHD Natural Refrigerant R-290 Model

D1RFENHD - Stainless steel front, aluminum end panels and interior D1RFENSAHD - Stainless steel exterior, aluminum interior D1RFENSSHD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)		
Stainless steel case back	Hinged glass doors (consult factory)	
Additional epoxy coated steel shelves	Special electrical req. (consult factory)	
Chrome or stainless steel shelves	Correctional Facility Options	
Rehinging of doors (consult factory)	One way security screws	
Universal pan slides	Locking hasp (lock not included)	
Wine rack	Stainless steel mesh cover	
Casters	Coverless hinges	
Custom laminates		

Consult factory for other model configurations, options and accessories.





Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	
AIA #:	SIS #:	

Standard Model Features

REFRIGERATION SYSTEM

Separate, self contained, performance rated refrigeration systems (coil housing in cabinet zones) Natural, environmentally safe, high efficiency R-290 refrigerant¹ Automatic, electric condensate evaporator

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation
Smooth, polished chrome workflow door handles
Cam action, lift off hinges
Self-closing doors
Magnetic snap in Santoprene [™] door gaskets
Cylinder lock in each door
Heavy duty, epoxy coated steel shelves
Heavy duty pilaster strips
Adjustable 6" stainless steel legs

MODEL FEATURES

LED interior lighting Electronic controllers with digital display & hi-low alarm Off-cycle defrost (refrigerator section) Automatic electric defrost (freezer section)

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:


Model Specifications


11/11 (311/311 cu l)

DIMENSIONAL DATA

Net Capacity (cubic feet)

Model Plan Views

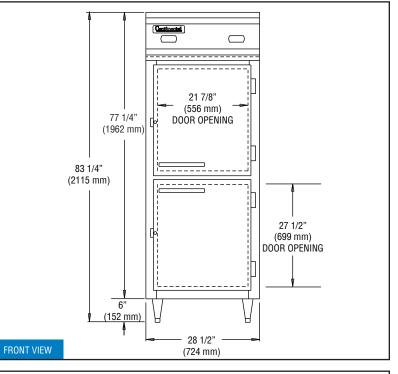

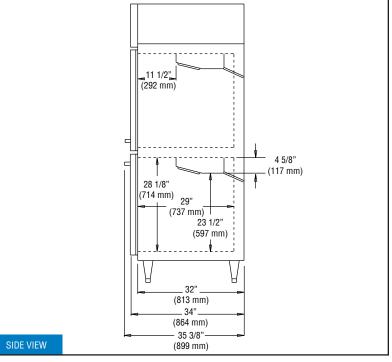

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.

Width, Overall (inches)	28 1/2 (724 mm)	
Depth, Overall (inches) (including handles)	35 3/8 (899 mm)	
Depth (inches) (less doors)	32 (813 mm)	
Depth (inches) (doors open 90°)	58 (1473 mm)	
Clear Door Width (inches)	21 7/8 (556 mm)	
Clear Half Door Height (inches)	27 1/2 (699 mm)	
Height, Overall (inches) (including 6" legs)	83 1/4 (2115 mm)	
Number of Doors	2	
Number of Shelves	4	
Shelf Area (square feet)	20.4 (1.9 sq m)	
Tray Slide Capacity (per half section)	11	
REFRIGERANT DATA		
Condensing Unit Size (H.P.)	1/5, 1/3	
Capacity (BTU per hour)*	1625, 1800	
ELECTRICAL DATA		
Voltage (International)	115/60/1 (220/50/1)	
Feed Wires (including ground)	3/3	
Total Amps (International)	2.5 (2.7) / 5.7 (3.0)	
Defrost Amps (International)	3.9 (2.2)	
(2) 10 ft. Cord/Plug [attach.] (International)	Yes (No)	
SHIPPING DATA		
Height - Crated (inches)	85 1/2 (2172 mm)	
Width - Crated (inches)	31 5/8 (803 mm)	
Depth - Crated (inches)	42 (1067 mm)	
Volume - Crated (cubic feet)	65 (1841 cu l)	
Weight Std - Crated (pounds)	410 (186 kg)	
Weight SS - Crated (pounds)	490 (223 kg)	
* Pating @ 125°E evaporator 00°E ambient (refrigerator)		

* Rating @ +25°F evaporator, 90°F ambient (refrigerator)

* Rating @ -15°F evaporator, 90°F ambient (freezer)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Equipped with two NEMA-5-15P Plugs (varies by country)



Due to our continued efforts in developing innovative products, specifications subject to change without notice.





Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.