DESIGNER LINE REFRIGERATOR/FREEZER



1-Section Dual Temp Extra-Wide Over/Under Reach-In Refrigerator/Freezer (0°F)

Model: D1RFXNHD Natural Refrigerant R-290 Model

D1RFXNHD - Stainless steel front, aluminum end panels and interior D1RFXNSAHD - Stainless steel exterior, aluminum interior D1RFXNSSHD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)		
Stainless steel case back	Hinged glass doors (consult factory)	
Additional epoxy coated steel shelves	Special electrical req. (consult factory)	
Chrome or stainless steel shelves	Correctional Facility Options	
Rehinging of doors (consult factory)	One way security screws	
Wine rack	Locking hasp (lock not included)	
Casters	Stainless steel mesh cover	
Custom laminates	Coverless hinges	

Consult factory for other model configurations, options and accessories.





Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	
ΔIΔ #·	SIS #·	

Standard Model Features

REFRIGERATION SYSTEM

Separate, self contained, performance rated refrigeration systems (coil housing in cabinet zones) Natural, environmentally safe,

high efficiency R-290 refrigerant¹

Automatic, electric condensate evaporator

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation Smooth, polished chrome workflow door handles Cam action, lift off hinges Self-closing doors Magnetic snap in Santoprene™ door gaskets Cylinder lock in each door Heavy duty, epoxy coated steel shelves Heavy duty pilaster strips Adjustable 6" stainless steel legs

MODEL FEATURES

LED interior lighting Electronic controllers with digital display & hi-low alarm Off-cycle defrost (refrigerator section) Automatic electric defrost (freezer section)

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:


Model Specifications

DIMENSIONAL DATA Net Capacity (cubic feet) 16/16 (453/453 cu l) Width, Overall (inches) 36 1/4 (921 mm) Depth, Overall (inches) 35 3/8 (899 mm) (including handles) Depth (inches) (less doors) 32 (813 mm) Depth (inches) (doors open 90°) 66 (1676 mm) Clear Door Width (inches) 29 5/8 (752 mm) Clear Half Door Height (inches) 27 1/2 (699 mm) Height, Overall (inches) 83 1/4 (2115 mm) (including 6" legs) Number of Doors 2 Number of Shelves 4 Shelf Area (square feet) 24.4 (2.3 sq m) **REFRIGERANT DATA** Condensing Unit Size (H.P.) 1/5, 1/3 Capacity (BTU per hour)* 1250 / 1725 **ELECTRICAL DATA** Voltage (International) 115/60/1 (220/50/1) Feed Wires (including ground) 3/3 Total Amps (International) 2.5 (2.7) / 5.7 (3.0) Defrost Amps (International) 3.9 (2.2) (2) 10 ft. Cord/Plug [attach.] Yes (International) (No) **SHIPPING DATA** Height - Crated (inches) 85 1/2 (2172 mm) Width - Crated (inches) 42 (1067 mm) Depth - Crated (inches) 42 (1067 mm) Volume - Crated (cubic feet) 87 (2464 cu l) Weight Std - Crated (pounds) 535 (243 kg) Weight SS - Crated (pounds) 640 (291 kg)

* Rating @ +25°F evaporator, 90°F ambient (refrigerator)

* Rating @ -15°F evaporator, 90°F ambient (freezer)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.





Due to our continued efforts in developing innovative products, specifications subject to change without notice.






Toll-Free: 800-523-7138 Phone: 215-244-1400


Fax: 215-244-9579 539 Dunksferry Road

Bensalem, PA 19020 www.continentalrefrigerator.com

© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products. Inc.

Model Plan Views

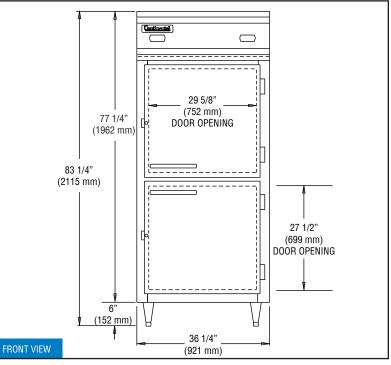

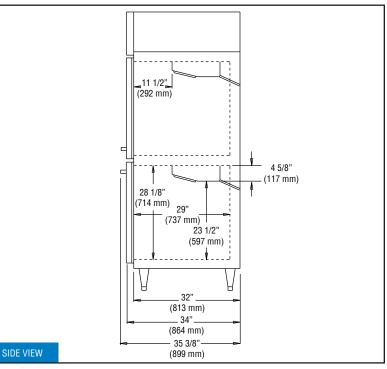

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.