## **DESIGNER LINE REFRIGERATOR**

## **Model: D1RNPTHD**

Natural Refrigerant R-290 Model



## 1-Section Pass-Thru Refrigerator with Half Doors

D1RNPTHD - Stainless steel front, aluminum end panels and interior

**D1RNSAPTHD** - Stainless steel exterior, aluminum interior

D1RNSSPTHD - Stainless steel exterior and interior




### **Options and Accessories**

(upcharge and lead times may apply)

Additional epoxy coated steel shelves	Correctional Facility Options
Chrome or stainless steel shelves	One way security screws
Wine racks	Locking hasp (lock not included)
Caster options	Stainless steel mesh cover
Pan slide assemblies	Coverless hinges
Custom laminates	Special electrical requirements (consult factory)
Glass door(s) (consult factory)	Re-hinging of doors (consult factory)

Consult factory for other model configurations, options and accessories

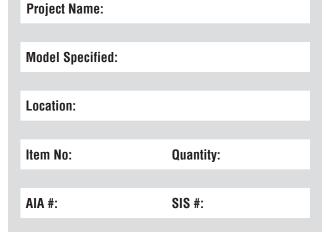

## **Standard Model Features**

#### **REFRIGERATION SYSTEM**

Self contained, performance rated "plug" refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

#### **CABINET ARCHITECTURE**

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty pilaster strips

Heavy duty, epoxy coated steel shelves

Adjustable 6" stainless steel legs

#### **MODEL FEATURES**

LED interior lighting

Electronic control, off cycle defrost

Top and side air distribution ducts

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.





APPROVAL:

## **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cubic feet)	21 (595 cu I)
Width, Overall (inches)	26 (660 mm)
Depth, Overall (inches) (including handles)	38 ¾ (984 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	79 (2007 mm)
Clear Door Width (inches)	19 3/8 (492 mm)
Clear Half Door Height (inches)	27 ½ (699 mm)
Height, Overall (inches) (including 6" legs)	83 ½ (2115 mm)
Number of Doors	4
Number of Shelves	3
Shelf Area (square feet)	20.4 (1.9 sq m)
Tray Slide Capacity (per half section) (2" centers)	11

#### **REFRIGERANT DATA**

Condensing Unit Size (H.P.)	1/4
Capacity (BTU per hour)*	1940

#### **ELECTRICAL DATA**

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	5.5 (3.9)
10 ft. Cord/Plug [attached] (International)	Yes (No)

#### **SHIPPING DATA**

Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	31 % (803 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	65 (1841 cu I)
Weight Std - Crated (pounds)	355 (162 kg)
Weight SS - Crated (pounds)	425 (193 kg)

\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)

# Continental® Refrigerator

**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

## **Model Plan Views**

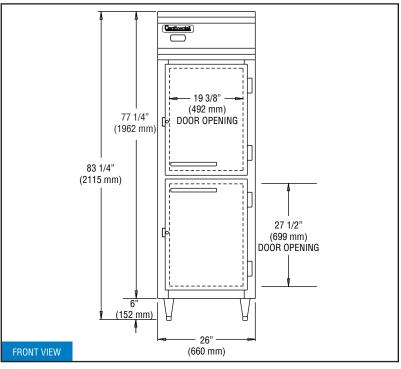

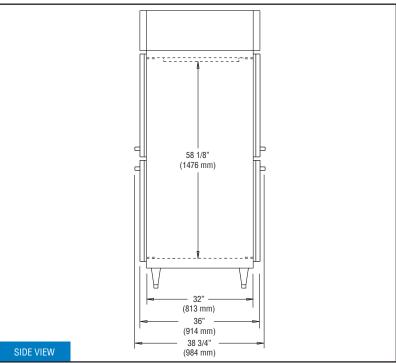

**IMPORTANT NOTE:** If the cabinet is located under a low ceiling, a <u>minimum</u> <u>clearance of 12" is required on top and 3" on sides.</u>