DESIGNER LINE REFRIGERATOR

Model: D1RSNHD

Natural Refrigerant R-290 Model



1-Section Reach-In Refrigerator with Half Doors - Shallow Depth

D1RSNHD - Stainless steel front, aluminum end panels and interior DRSNSAHD - Stainless steel exterior, aluminum interior D1RSNSSHD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Correctional Facility Options
Additional epoxy coated steel shelves	One way security screws
Chrome or stainless steel shelves	Locking hasp (lock not included)
Wine rack	Stainless steel mesh cover
Caster options	Coverless hinges
Custom laminates	Special electrical requirements (consult factory)
	Re-hinging of doors (consult factory)

Consult factory for other model configurations, options and accessories



Standard Model Features

SIS #:

REFRIGERATION SYSTEM

AIA#:

Self contained, performance rated refrigeration system (coil in the cabinet zone)

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, electric condensate evaporator

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap-in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty pilaster strips

Heavy duty, epoxy coated steel shelves

Adjustable 6" stainless steel legs

MODEL FEATURES

LED interior lighting

Electronic control, off cycle defrost

¹ R-290 refrigerant meets all federal and state regulatory requirements.





APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cubic feet)	16 (453 cu I)
Width, Overall (inches)	26 (660 mm)
Depth, Overall (inches) (including handles)	29 1/4 (743 mm)
Depth (inches) (less doors)	25 7/8 (657 mm)
Depth (inches) (doors open 90°)	49 1/2 (1257 mm)
Clear Door Width (inches)	19 3/8 (492 mm)
Clear Half Door Height (inches)	27 1/2 (699 mm)
Height, Overall (inches) (including 6" legs)	83 1/4 (2115 mm)
Number of Doors	2
Number of Shelves	3
Shelf Area (square feet)	20.4 (1.9 sq m)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/4
Capacity (BTU per hour)*	1940

ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	5.9 (3.9)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Height - Crated (inches)	85 1/2 (2172 mm)
Width - Crated (inches)	31 5/8 (803 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	65 (1841 cu I)
Weight Std - Crated (pounds)	285 (130 kg)
Weight SS - Crated (pounds)	340 (155 kg)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579 539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com Due to our continued efforts in developing innovative products, specifications subject to change without notice.





Intertek



© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

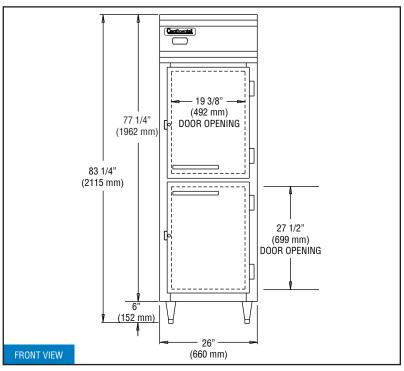

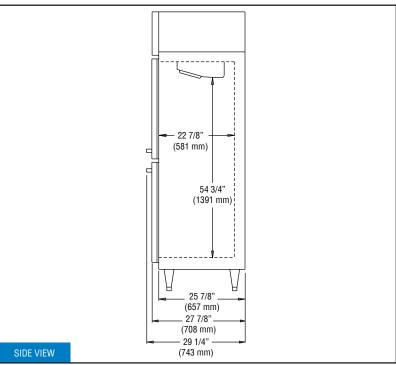

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.