
## **DESIGNER LINE DISPLAY REFRIGERATOR**

Jesigner line

# Model: D2RENGDHD



### 2-Section Extra-Wide **Reach-In Refrigerator** with Half Hinged Glass Doors

D2RENGDHD - Stainless steel front, aluminum end panels and interior D2RENSAGDHD - Stainless steel exterior, aluminum interior D2RENSSGDHD - Stainless steel exterior and interior



### **Options and Accessories**

(upcharge and lead times may apply)		
Stainless steel case back	Wine rack	
Additional epoxy coated steel shelves	Casters	
Chrome or stainless steel shelves	Universal pan slides	
Rehinging of door (consult factory)	Special electrical req. (consult factory)	

Consult factory for other model configurations, options and accessories.

Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	
AIA #:	SIS #:	

### **Standard Model Features**

#### **REFRIGERATION SYSTEM**

Self contained, performance rated "plug" refrigeration system Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup> Refrigeration system is readily accessible on top of cabinet, separate from the "food zone" Automatic, hot gas condensate evaporator Expansion valve system

#### **CABINET ARCHITECTURE**

3" non-CFC polyurethane foam insulation		
Triple-pane, tempered hinged glass doors		
Chrome-plated handles		
Cam action, lift-off hinges		
Self-closing doors		
Magnetic snap in door gaskets		
Cylinder lock in each door		
Heavy duty, epoxy coated steel shelves		
Heavy-duty pilaster strips		
Adjustable 6" stainless steel legs		

### **MODEL FEATURES**

LED interior lighting Top and side air distribution ducts Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site Electronic control, off cycle defrost

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.






**APPROVAL:** 

### **Model Specifications**

### **Model Plan Views**

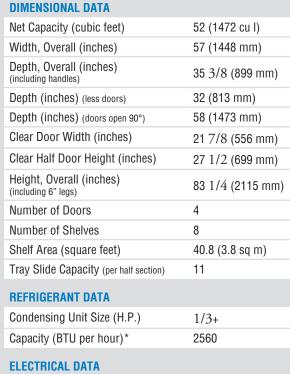

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	9.0 (6.1)
10 ft. Cord/Plug [attached] (International)	Yes (No)

#### **SHIPPING DATA**

Height - Crated (inches)	85 1/2 (2172 mm)
Width - Crated (inches)	64 (1626 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	133 (3766 cu l)
Weight Std - Crated (pounds)	540 (245 kg)
Weight SS - Crated (pounds)	615 (279 kg)

\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)




Due to our continued efforts in developing innovative products, specifications subject to change without notice




PROUDLY DESIGNED & ASSEMBLED IN THE U.S.A

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579 539 Dunksferry Road

Bensalem, PA 19020 www.continentalrefrigerator.com

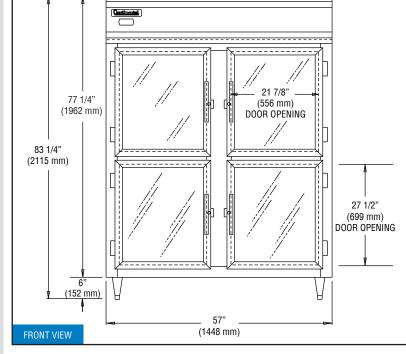

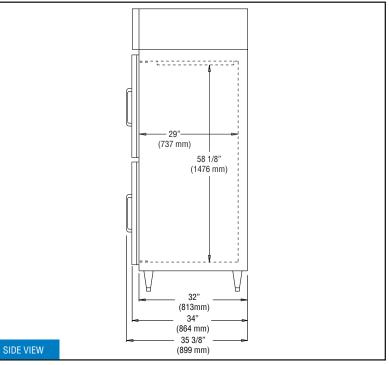

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.