DESIGNER LINE REFRIGERATOR/FREEZER

Model: D2RFN



Natural Refrigerant R-290 Model

2-Section Dual Temp Side-By-Side Reach-In Refrigerator/Freezer (0°F)

D2RFN - Stainless steel front, aluminum end panels and interior **D2RFNSA** - Stainless steel exterior, aluminum interior **D2RFNSS** - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply) Stainless steel case back Rehinging of doors (consult factory) Additional epoxy coated steel shelves Special electrical req. (consult factory) Chrome or stainless steel shelves **Correctional Facility Options** Custom laminates • One way security screws Pan slide assemblies Locking hasp (lock not included) • Wine rack • Stainless steel mesh cover Casters • Coverless hinges

Consult factory for other model configurations, options and accessories.





| Project Name: | | |
|------------------|-----------|--|
| Model Specified: | | |
| Location: | | |
| ltem No: | Quantity: | |
| AIA #: | SIS #: | |

Standard Model Features

REFRIGERATION SYSTEM

Separate, self contained, performance rated "plug" refrigeration systems

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation Smooth, polished chrome workflow door handles Cam action, lift off hinges Self-closing doors Magnetic snap in Santoprene™ door gaskets Cylinder lock in each door Heavy duty, epoxy coated steel shelves Heavy duty pilaster strips 6" adjustable stainless steel legs

MODEL FEATURES

LED interior lighting

Electronic controllers with digital display & hi-low alarm Top and side air distribution ducts Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site Off-cycle defrost (refrigerator section) Automatic electric defrost (freezer section)

¹ R-290 refrigerant meets all federal and state regulatory requirements.


APPROVAL:


Model Specifications

Model Plan Views

 \square

| DIMENSIONAL DATA | | |
|---|------------------------|--|
| Net Capacity (cubic feet) | 21, 21 (595, 595 cu l) | |
| Width, Overall (inches) | 52 (1321 mm) | |
| Depth, Overall (inches) (including handles) | 35 3/8 (899 mm) | |
| Depth (inches) (less doors) | 32 (813 mm) | |
| Depth (inches) (doors open 90°) | 55 1/2 (1410 mm) | |
| Clear Door Width (inches) | 19 3/8 (492 mm) | |
| Clear Door Height (inches) | 58 5/8 (1489 mm) | |
| Height, Overall (inches) (including 6" legs) | 83 1/4 (2115 mm) | |
| Number of Doors | 2 | |
| Number of Shelves | 6 | |
| Shelf Area (square feet) (per section) | 20.4 (1.9 sq m) | |
| Tray Slide Capacity (per section) | 24 | |
| REFRIGERANT DATA | | |
| Condensing Unit Size (H.P.) | 1/4, 1/2 | |
| Capacity (BTU per hour)* | 1940, 1590 | |
| ELECTRICAL DATA | | |
| Voltage (International) | 115/60/1 (220/50/1) | |
| Feed Wires (including ground) | 3, 3 | |
| Total Amps (International) | 5.1 (3.7), 6.5 (4.1) | |
| Defrost Amps (International) | 4.3 (2.2) | |
| (2) 10 ft. Cord/Plug [attach.] (International) | Yes (No) | |
| SHIPPING DATA | | |
| Height - Crated (inches) | 85 1/2 (2172 mm) | |
| Width - Crated (inches) | 64 (1626 mm) | |
| Depth - Crated (inches) | 42 (1067 mm) | |
| Volume - Crated (cubic feet) | 133 (3766 cu l) | |
| Weight Std - Crated (pounds) | 515 (234 kg) | |
| Weight SS - Crated (pounds) | 610 (277 kg) | |
| * Rating @ +25°F evaporator, 90°F ambient (refrigerator) * Rating @ -15°F evaporator, 90°F ambient (freezer) | | |

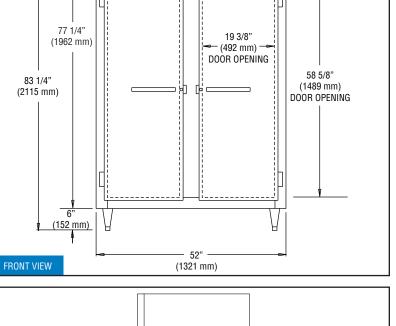

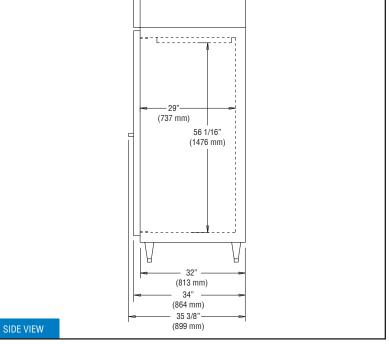

Equipped with two NEMA-5-15P Plugs (varies by country)

whole unit.

Figures in parentheses reflect metric equivalents rounded to the nearest



Due to our continued efforts in developing innovative products, specifications subject to change without notice.





Toll-Free: 800-523-7138 Phone: 215-244-1400

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Fax: 215-244-9579

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.

© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.