## DESIGNER LINE REFRIGERATOR/FREEZER

Josigner line

# Model: D2RFNPTHD

Natural Refrigerant R-290 Model

## 2-Section Dual Temp Side-By-Side Pass-Thru Refrigerator/Freezer (0°F) with Half Doors

D2RFNPTHD - Stainless steel front, aluminum end panels and interior D2RFNSAPTHD - Stainless steel exterior, aluminum interior D2RFNSSPTHD - Stainless steel exterior and interior



### **Options and Accessories**

#### (upcharge and lead times may apply)

Additional epoxy coated steel shelves	Increased refrigeration systems	
Chrome or stainless steel shelves	Special electrical req. (consult factory)	
Pan slide assemblies	<b>Correctional Facility Options</b>	
Rehinging of doors (consult factory)	One way security screws	
Wine rack (refrigerator section)	• Locking hasp (lock not included)	
Casters	Stainless steel mesh cover	
Custom laminates	Coverless hinges	

Consult factory for other model configurations, options and accessories.





Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	
AIA #:	SIS #:	

## **Standard Model Features**

#### **REFRIGERATION SYSTEM**

Separate, self contained, performance rated "plug" refrigeration systems

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

### **CABINET ARCHITECTURE**

3" non-CFC polyurethane foam insulation Smooth, polished chrome workflow door handles Cam action, lift off hinges Self-closing doors Magnetic snap in Santoprene™ door gaskets Cylinder lock in each door Heavy duty, epoxy coated steel shelves Heavy duty pilaster strips 6" adjustable stainless steel legs

### **MODEL FEATURES**


### LED interior lighting Electronic controllers with digital display & hi-low alarm Top and side air distribution ducts Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site Off-cycle defrost (refrigerator section) Automatic electric defrost (freezer section)


**APPROVAL:** 

# **Model Specifications**

## **Model Plan Views**

DIMENSIONAL DATA	04 04 (505 505 1)	
Net Capacity (cubic feet)	21, 21 (595, 595 cu l)	
Width, Overall (inches)	52 (1321 mm)	
Depth, Overall (inches) (including handles)	38 3/4 (984 mm)	
Depth (inches) (less doors)	32 (813 mm)	
Depth (inches) (doors open 90°)	79 (2007 mm)	
Clear Door Width (inches)	19 3/8 (492 mm)	
Clear Door Height (inches)	58 5/8 (1489 mm)	
Height, Overall (inches) (including 6" legs)	83 1/4 (2115 mm)	
Number of Doors	4	
Number of Shelves	6	
Shelf Area (square feet) (per section)	20.4 (1.9 sq m)	
Tray Slide Capacity (per section)	24	
REFRIGERANT DATA		
Condensing Unit Size (H.P.)	1/4, 1/2	
Capacity (BTU per hour)*	1940, 1590	
ELECTRICAL DATA		
Voltage (International)	115/60/1 (220/50/1)	
Feed Wires (including ground)	3, 3	
Total Amps (International)	5.5 (3.9), 6.9 (4.2)	
Defrost Amps (International)	4.3 (3.2)	
(2) 10 ft. Cord/Plug [attach.] (International)	Yes (No)	
SHIPPING DATA		
Height - Crated (inches)	85 1/2 (2172 mm)	
Width - Crated (inches)	64 (1626 mm)	
Depth - Crated (inches)	42 (1067 mm)	
Volume - Crated (cubic feet)	133 (3766 cu l)	
Weight Std - Crated (pounds)	640 (290 kg)	
Weight SS - Crated (pounds)	675 (306 kg)	
* Rating @ +25°F evaporator, 90°F ambient (refrigerator) * Rating @ -15°F evaporator, 90°F ambient (freezer) Figures in parentheses reflect metric equivalents rounded to the nearest whole unit		

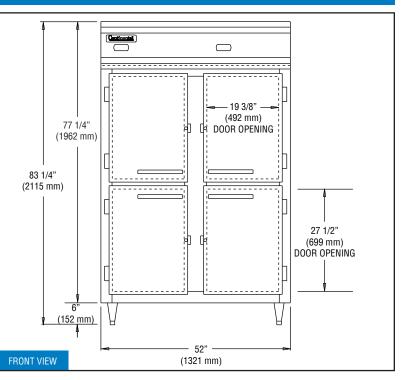

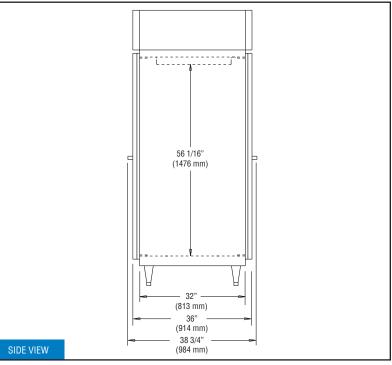

Continental®

Equipped with two NEMA-5-15P Plugs

(varies by country)

whole unit.

Refrigerator

innovative products, specifications subject to change without notice.



PROUDLY DESIGNED & ASSEMBLED IN THE U.S.A.

Toll-Free: 800-523-7138 Phone: 215-244-1400

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Fax: 215-244-9579

**IMPORTANT NOTE**: If the cabinet is located under a low ceiling, a <u>minimum clearance of 12" is required on</u> top and 3" on sides.

© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.