## **DESIGNER LINE DISPLAY REFRIGERATOR**

Model: D3RNGD

Natural Refrigerant R-290 Model



## 3-Section Display Reach-In Refrigerator with Hinged Glass Doors

D3RNGD - Stainless steel front, aluminum end panels and interior

D3RNSAGD - Stainless steel exterior, aluminum interior

D3RNSSGD - Stainless steel exterior and interior



## **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel case back	Wine rack
Additional epoxy coated steel shelves	Casters
Chrome or stainless steel shelves	Pan slide assemblies
Rehinging of door (consult factory)	Special electrical req. (consult factory)

Consult factory for other model configurations, options and accessories.



**Model Specified:** 

Location:

Item No: Quantity:

AIA #: SIS #:

## **Standard Model Features**

#### **REFRIGERATION SYSTEM**

Self contained, performance rated "plug" refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

#### **CABINET ARCHITECTURE**

3" non-CFC polyurethane foam insulation

Triple-pane, tempered hinged glass doors

Chrome-plated handles

Cam action, lift-off hinges

Self-closing doors

Magnetic snap in door gaskets

Cylinder lock in each door

Heavy duty, epoxy coated steel shelves

Heavy-duty pilaster strips

Adjustable 6" stainless steel legs

### **MODEL FEATURES**

LED interior lighting

Top and side air distribution ducts

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

Electronic control, off cycle defrost

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.





APPROVAL:

## **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cubic feet)	72 (2039 cu I)
Width, Overall (inches)	78 (1981 mm)
Depth, Overall (inches) (including handles)	35 3/8 (899 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	55 1/2 (1410 mm)
Clear Door Width (inches)	19 3/8 (492 mm)
Clear Door Height (inches)	58 5/8 (1489 mm)
Height, Overall (inches) (including 6" legs)	83 1/4 (2115 mm)
Number of Doors	3
Number of Shelves	12
Shelf Area (square feet)	61.2 (5.7 sq m)
Tray Slide Capacity (per section)	24

#### **REFRIGERANT DATA**

Condensing Unit Size (H.P.)	1/2+	
Capacity (BTU per hour)*	4010	

#### **ELECTRICAL DATA**

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	9.5 (6.2)
10 ft. Cord/Plug [attached] (International)	Yes (No)

#### **SHIPPING DATA**

Height - Crated (inches)	85 1/2 (2172 mm)
Width - Crated (inches)	90 (2286 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	187 (5295 cu I)
Weight Std - Crated (pounds)	690 (313 kg)
Weight SS - Crated (pounds)	800 (363 kg)

\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)

# Continental® Refrigerator Due to our continued efforts in developing

**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

## **Model Plan Views**

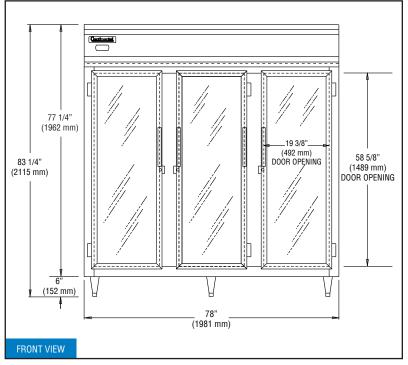

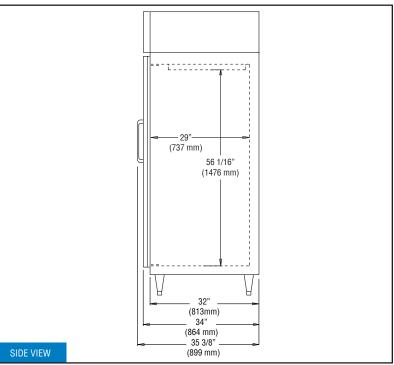

**IMPORTANT NOTE:** If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.