DESIGNER LINE REFRIGERATOR/FREEZER

Model: D3RRFENHD

Natural Refrigerant R-290 Model



2-Section Extra-Wide Dual Temp Side-By-Side Reach-In Refrigerator/ Freezer (0°F) with Half Doors

D3RRFENHD - Stainless steel front, aluminum end panels and interior D3RRFENSAHD - Stainless steel exterior, aluminum interior D3RRFENSSHD - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Hinged glass doors (consult factory)
Additional epoxy coated steel shelves	Special electrical req. (consult factory)
Chrome or stainless steel shelves	Correctional Facility Options
Rehinging of doors (consult factory)	One way security screws
Universal pan slides	Locking hasp (lock not included)
Wine rack	Stainless steel mesh cover
Casters	Coverless hinges
Custom laminates	

Consult factory for other model configurations, options and accessories.





Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
a.a. #	010 #
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Separate, self contained, performance rated "plug" refrigeration systems

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty, epoxy coated steel shelves

Heavy duty pilaster strips

6" adjustable stainless steel legs

MODEL FEATURES

LED interior lighting

Electronic controllers with digital display & hi-low alarm

Top and side air distribution ducts

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

Off-cycle defrost (refrigerator section)

Automatic electric defrost (freezer section)

APPROVAL:

Model Specifications

model openingations		
DIMENSIONAL DATA		
Net Capacity (cubic feet)	50/21 (1416/595 cu I)	
Width, Overall (inches)	85 1/2 (2172 mm)	
Depth, Overall (inches) (including handles)	35 3/8 (899 mm)	
Depth (inches) (less doors)	32 (813 mm)	
Depth (inches) (doors open 90°)	58 (1473 mm)	
Clear Door Width (inches)	21 7/8 (556 mm)	
Clear Half Door Height (inches)	27 1/2 (699 mm)	
Height, Overall (inches) (including 5" casters)	82 1/4 (2089 mm)	
Number of Doors	6	
Number of Shelves	9	
Shelf Area (square feet) (per section)	20.4 (1.9 sq m)	
Tray Slide Capacity (per half section)	11	
REFRIGERANT DATA		
Condensing Unit Size (H.P.)	1/3 +, 1/2	
Capacity (BTU per hour)*	2560, 1590	
ELECTRICAL DATA		
Voltage (International)	115/60/1 (220/50/1)	
Feed Wires (including ground)	3/3	

(International) SHIPPING DATA

Total Amps (International)

Defrost Amps (International)

(2) 10 ft. Cord/Plug [attach.]

OIIII I ING DATA	
Height - Crated (inches)	85 1/2 (2172 mm)
Width - Crated (inches)	90 (2286 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	181 (5125 cu I)
Weight Std - Crated (pounds)	840 (382 kg)
Weight SS - Crated (pounds)	1000 (454 kg)

6.3 (4.3) / 6.5 (4.1)

4.3 (2.2)

Yes

(No)

- * Rating @ +25°F evaporator, 90°F ambient (refrigerator)
- * Rating @ -15°F evaporator, 90°F ambient (freezer)

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.


whole dilit.


Equipped with two NEMA-5-15P Plugs (varies by country)

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579 Say Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com Due to our continued efforts in developing innovative products, specifications subject to change without notice. PROUDLY DESIGNED & ASSEMBLED IN THE U.S.A. © Copyright 2021. Continental Refrigerator.

A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

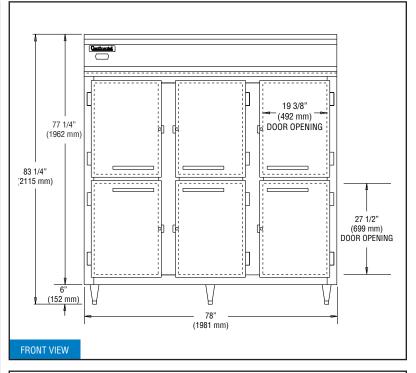

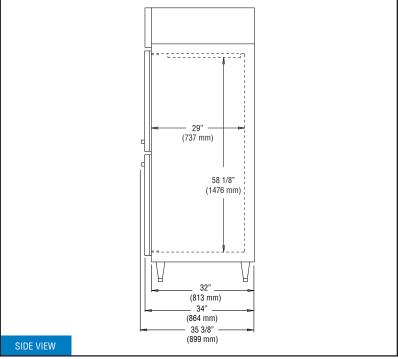

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.