DESIGNER LINE SANDWICH UNIT

Model: D48N18M-D Natural Refrigerant R-290 Model



48" Mighty Top Sandwich Unit Refrigerator with Drawers - 18 Pans

Stainless steel front, top and end panels and interior.



Options and Accessories

| (upcharge and lead times may apply) | | |
|-------------------------------------|----------------------------|--|
| Stainless steel back | Rear mounted cutting board | |
| Overshelves (single or double) | Composite cutting board | |
| Drawer locks | Flat insulated night cover | |
| Crumb catcher | Vision panel lid | |
| Casters | Modified pan openings | |
| Front breathing | | |

Consult factory for other model configurations, options and accessories.





| Project Name: | |
|------------------|-----------|
| Model Specified: | |
| Location: | |
| Item No: | Quantity: |
| | Quantity. |
| AIA #: | SIS #: |

Standard Model Features

REFRIGERATION SYSTEM

| Performance rated refrigeration system |
|--|
| Natural, environmentally safe, high efficiency R-290 refrigerant ¹ |
| Unique air flow distribution allows pan product to maintain 33° - 41°F |
| Automatic, hot gas condensate evaporator |
| Non-corrosive, plasticized fin evaporator coil |
| Expansion valve system |
| Easily serviceable, back mounted compressor |

CABINET ARCHITECTURE

| 2" non-CFC polyurethane foam insulation |
|---|
| Smooth, polished chrome drawer handles |
| Stainless steel roll out drawers |
| Magnetic snap in Santoprene™ drawer gaskets |
| 8" deep, full length nylon cutting board |
| Insulated lid |
| Completely enclosed, vented and removable case back |
| 6" adjustable, stainless steel legs |
| |

MODEL FEATURES

| Electronic control, off cycle defrost |
|--|
| (18) ¹ / ₆ size recessed pans, 4" deep |
| Removable interior tub below pans |

¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

Model Specifications

Model Plan Views

| DIMENSIONAL DATA | |
|---|-----------------|
| Net Capacity (cubic feet) | 13.4 (379 cu l) |
| 1/6 Size Pans (4" deep) | 18 |
| Width, Overall (inches) | 48 (1219 mm) |
| Depth, Overall (inches) (including bumpers) | 35 (890 mm) |
| Depth, Cutting Board (inches) | 8 (203 mm) |
| Height, Overall (inches) (including 6" legs) | 43 ¼ (1099 mm) |
| Number of Drawers | 4 |
| | |

REFRIGERANT DATA

| Condensing Unit Size (H.P.) | 1/4 |
|-----------------------------|------|
| Capacity (BTU per hour)* | 1940 |

ELECTRICAL DATA

| Voltage (International) | 115/60/1 (220/50/1) |
|--|---------------------|
| Total Amps (International) | 4.8 (2.7) |
| 10 ft. Cord/Plug [attached] (International) | Yes (No) |

SHIPPING DATA

| Weight (pounds) | 405 (184 kg) |
|--------------------------|----------------|
| Height - Crated (inches) | 43 ¼ (1099 mm) |
| Width - Crated (inches) | 56 (1422 mm) |
| Depth - Crated (inches) | 37 ¼ (946 mm) |


DRAWER PAN CONFIGURATIONS


Two Tier: (1) $\frac{1}{2}$ size x 6 & (1) $\frac{1}{3}$ x 6 pan per drawer


* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



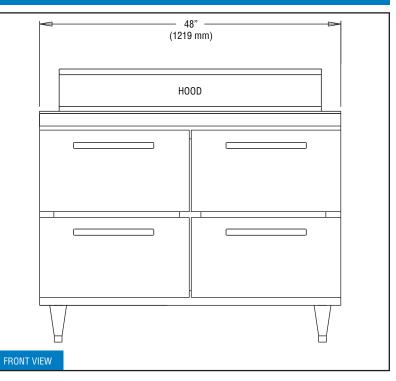

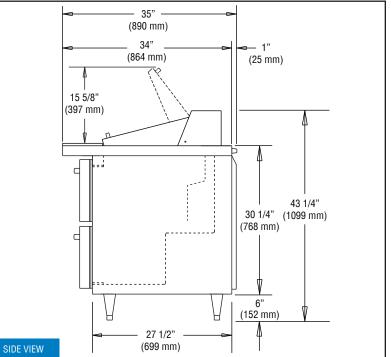

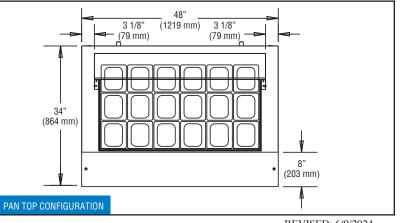

REVISED: 6/9/2024