# DESIGNER LINE SANDWICH UNIT

Model: D72N24M-D Natural Refrigerant R-290 Model



## 72" Mighty Top Sandwich Unit Refrigerator with Drawers - 24 Pans

Stainless steel front, top and end panels and interior.



### **Options and Accessories**

| (upcharge and lead times may apply) |                            |  |
|-------------------------------------|----------------------------|--|
| Stainless steel back                | Rear mounted cutting board |  |
| Overshelves (single or double)      | Composite cutting board    |  |
| Drawer locks                        | Flat insulated night cover |  |
| Crumb catcher                       | Vision panel lid           |  |
| Casters                             | Modified pan openings      |  |
| Front breathing                     |                            |  |

Consult factory for other model configurations, options and accessories.





| Project Name:    |           |
|------------------|-----------|
|                  |           |
| Model Specified: |           |
|                  |           |
| Location:        |           |
|                  |           |
| Item No:         | Quantity: |
|                  |           |
| AIA #:           | SIS #:    |

### **Standard Model Features**

#### **REFRIGERATION SYSTEM**

| Performance rated refrigeration system   |
|--|
| Natural, environmentally safe,<br>high efficiency R-290 refrigerant <sup>1</sup> |
| Unique air flow distribution allows<br>pan product to maintain 33° - 41°F        |
| Automatic, hot gas condensate evaporator   |
| Non-corrosive, plasticized fin evaporator coil                                   |
| Expansion valve system   |
| Easily serviceable, back mounted compressor                                      |

### **CABINET ARCHITECTURE**

| 2" non-CFC polyurethane foam insulation             |  |
|---|--|
| Smooth, polished chrome drawer handles              |  |
| Stainless steel roll out drawers                    |  |
| Magnetic snap in Santoprene™ drawer gaskets         |  |
| 8" deep, full length nylon cutting board            |  |
| Insulated lid                                       |  |
| Completely enclosed, vented and removable case back |  |
| 6" adjustable, stainless steel legs                 |  |

### **MODEL FEATURES**

| Electronic control, off cycle defrost                        |  |
|--|--|
| (24) <sup>1</sup> / <sub>6</sub> size recessed pans, 4" deep |  |
| Removable interior tub below pans                            |  |

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

### **Model Specifications**

#### **DIMENSIONAL DATA** Net Capacity (cubic feet) 20.6 (583 cu l) 24 <sup>1</sup>/<sub>6</sub> Size Pans (4" deep) Width, Overall (inches) 72 (1829 mm) Depth, Overall (inches) 35 (890 mm) (including bumpers) Depth, Cutting Board (inches) 8 (203 mm) Height, Overall (inches) 43 1/4 (1099 mm) (including 6" legs) 6 Number of Drawers

### **REFRIGERANT DATA**

| Condensing Unit Size (H.P.) | 1⁄3+ |
|-----------------------------|------|
| Capacity (BTU per hour)*    | 2560 |

### **ELECTRICAL DATA**

| Voltage (International)                        | 115/60/1 (220/50/1) |
|--|---------------------|
| Total Amps (International)                     | 6.0 (3.6)           |
| 10 ft. Cord/Plug [attached]<br>(International) | Yes<br>(No)         |

#### **SHIPPING DATA**

| Weight (pounds)          | 565 (257 kg)   |
|--------------------------|----------------|
| Height - Crated (inches) | 43 ¼ (1099 mm) |
| Width - Crated (inches)  | 80 (2032 mm)   |
| Depth - Crated (inches)  | 37 ¼ (946 mm)  |

### **DRAWER PAN CONFIGURATIONS**

#### **Two Tier**: (1) $\frac{1}{2}$ size x 6 & (1) $\frac{1}{3}$ x 6 pan per drawer

\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.




us (NSF.)


PROUDLY


DESIGNED & ASSEMBLED IN THE U.S.A.



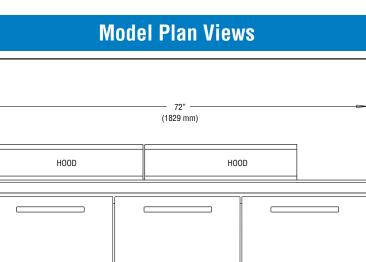

-

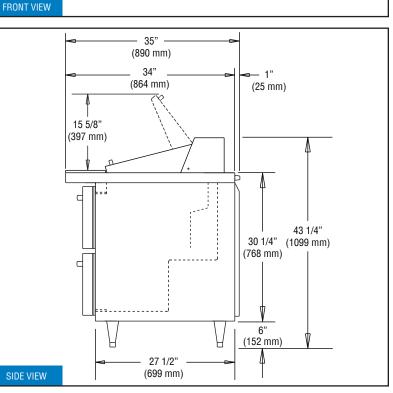

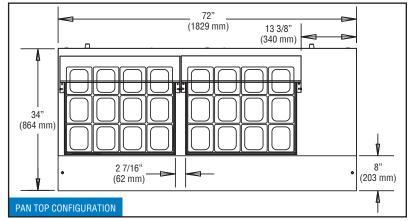

REVISED: 6/9/2024