### SHALLOW DEPTH BASE MODEL FREEZER

## Model: FA60SN

Natural Refrigerant R-290 Model

# 60" Shallow Depth Worktop Freezer with Solid Doors

Heavy gauge #300 series stainless steel top, stainless steel front and end panels, galvanized steel rear and grills and aluminum interior.



## **Options and Accessories**

(upcharge and lead times may apply)		
Stainless steel interior	Condensing unit left (standard on right)	
Stainless steel back	Door Locks	
Additional epoxy coated steel shelves	Front Breathing	
Stainless Steel Shelves	Overshelves (single or double)	
Adjustable legs	Drawers in lieu of doors**	
Drawer in lieu of door section above the condensing unit*		

Consult factory for other model configurations, options and accessories.

\*Drawer section above condensing unit holds (4) 1/6 pans

\*\*Two tier (larger section): (1) 12 x 20 x 6 pan per drawer

\*\*Two Narrow: (4) 1/6 pans per drawer





Project Name:		
Model Specified:		
Location:		
Item No:	Quantity:	
AIA #:	SIS #:	

## **Standard Model Features**

#### **REFRIGERATION SYSTEM**

 Performance rated refrigeration system

 Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

 Unique forced air design utilizes fans (approx. every 12") across the entire back of unit for even distribution of cold

 Automatic, hot gas condensate evaporator

 Non-corrosive, plasticized fin evaporator coil

 Easily serviceable, slide out condensing unit

 Expansion valve system

### **CABINET ARCHITECTURE**

2" non-CFC polyurethane foam insulation
Smooth, polished chrome door handles
Spring loaded, self closing doors
Magnetic snap in Santoprene™ door gaskets
Heavy duty, epoxy coated steel shelves
Completely enclosed, vented and removable rear and side grills
5" casters

### **MODEL FEATURES**

Refrigerated section with door above the condensing unit Electronic control, automatic electric defrost

Field rehingeable doors

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

**NOTE:** Models come standard with a door above the condensing unit. A drawer above the condensing unit is an option.

APPROVAL:

# **Model Specifications**

# **Model Plan Views**

DIMENSIONAL DATA	
Net Capacity (cubic feet)	15.2 (430 cu l)
Width, Overall (inches)	60 (1524 mm)
Depth, Overall (inches) (including handles & bumpers)	31 (770 mm)
Height, Overall (inches) (including 5" casters	35 (889 mm)
Shelf Area (square feet)	5.68 (0.5 sq m)
Number of Shelves	4
Number of Full Doors	2
Number of Half Doors	1
Interior Depth (inches)	24 (610 mm)
Interior Height (inches)	26 (660 mm)
Interior Height (inches) (above condenser)	12 1/2 (318 mm)

### **REFRIGERANT DATA**

Capacity (BTU per hour)*	2180

#### **ELECTRICAL DATA**


Voltage (International)	115/60/1 (220/50/1)
Total Amps (International)	6.1 (3.4)
Defrost Amps (International)	9.1 (4.8)
10 ft. Cord/Plug [attached] (International)	Yes (No)

#### **SHIPPING DATA**

Weight (pounds)	320 (145 kg)
Height - Crated (inches)	43 3/4 (1111 mm)
Width - Crated (inches)	62 (1575 mm)
Depth - Crated (inches)	47 (1194 mm)

\* Rating @ -15°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.





Due to our continued efforts in developing innovative products, specifications subject to change without notice.




IN THE U.S.A


Toll-Free: 800-523-7138 Phone: 215-244-1400

Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com



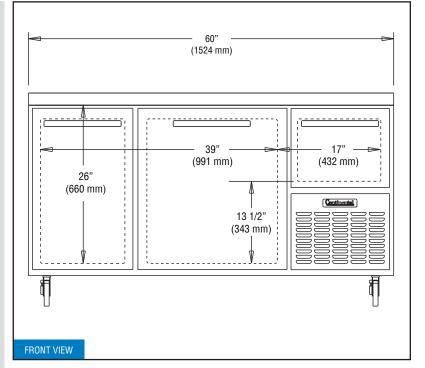

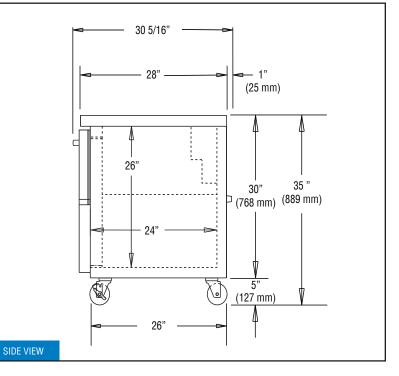

© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.