PIZZA PREPARATION TABLE

Model: PA60N

Natural Refrigerant R-290 Model

60" Pizza Preparation Refrigerator with Solid Doors

Heavy gauge #300 series stainless steel top, stainless steel front and end panels, aluminum interior.



Options and Accessories

(upcharge and lead times may apply)	
Stainless steel interior	Pan slides
Stainless steel back	Wire rod garnish rack
Overshelves (single or double)	Vision panel lid
Additional epoxy coated steel shelves	Door/Drawer locks
Stainless steel shelves	Adjustable legs
Condensing unit on left (standard on right)	Front breathing
Drawer in lieu of half door above condensing unit*	Special electrical requirements (consult factory)
Drawers in lieu of doors (consult factory)**	


Consult factory for other model configurations, options and accessories.

*Drawer section above condensing unit holds (1) $12 \times 20 \times 6$ pan.

**Two tier (larger section): (2) 12x20x6 pans per drawer

**Two Narrow: (1) 12x20x6 pan per drawer





Standard Model Features

REFRIGERATION SYSTEM

Performance rated refrigeration system
Natural, environmentally safe, high efficiency R-290 refrigerant ¹
Unique forced air design utilizes fans (approx. every 12") across the entire back of unit for even distribution of cold
Automatic, hot gas condensate evaporator
Non-corrosive, plasticized fin evaporator coil
Easily serviceable, slide out condensing unit
Expansion valve system
CABINET ARCHITECTURE
2" non-CFC polyurethane foam insulation
Smooth, polished chrome door handles
Spring loaded, self closing doors
Magnetic snap in Santoprene™ door gaskets
Heavy duty, epoxy coated steel shelves
19" deep, full length nylon cutting board
Insulated lids (with heavy duty hinge pins)
(7) pan top divider bars*
5" casters
* Pans supplied by others
MODEL FEATURES
Reversing condenser fan ²
Ergonomically-friendly raised angle rail
Electronic control, off-cycle defrost
Refrigerated section with door above the condensing unit
Field rehingeable doors
¹ R-290 refrigerant meets all federal and state regulatory requirements. ² Fan runs in reverse for short period on startup to blow away any debris. NOTE: Models come standard with a door above the condensing unit

¹ R-290 retrigerant meets an lederal and state regulatory requirements.
² Fan runs in reverse for short period on startup to blow away any debris.
<u>NOTE</u>: Models come standard with a door above the condensing unit, a smaller width door (left section) and larger width door (center section).
The option of having the doors located in the opposite sections <u>MUST</u> be indicated at the time of ordering. A drawer above the condensing unit is an option.

APPROVAL:

6 Year Parts & L 7 Year


Model Specifications

Model Plan Views

DIMENSIONAL DATA	
Net Capacity (cubic feet)	19 (538 cu l)
Width, Overall (inches)	60 (1524 mm)
Depth, Overall (inches) (including cutting board & bumpers)	38 3/4 (972 mm)
Height, Overall (inches) (including 5" casters)	39 (989 mm)
Depth, Cutting Board (inches)	19 (483 mm)
Shelf Area (square feet)	7.1 (0.7 sq m)
Number of Shelves	2
Number of Full Doors	2
Number of Half Doors	1
Interior Depth (inches)	27 3/8 (695 mm)
Interior Height (inches)	26 (660 mm)
Interior Height (inches) (above condenser)	12 1/2 (318 mm)
PAN TOP	
Divider Bars (supplied with model)	(7) CM1-0111
Pan Capacity (pans supplied by others)	(8) 1/3
Pan Capacity (pans supplied by others) REFRIGERANT DATA	(8) 1/3
	(8) 1/3 1/3+
REFRIGERANT DATA	
REFRIGERANT DATA Condensing Unit Size (H.P.)	1/3+
REFRIGERANT DATA Condensing Unit Size (H.P.) Capacity (BTU per hour)*	1/3+
REFRIGERANT DATA Condensing Unit Size (H.P.) Capacity (BTU per hour)* ELECTRICAL DATA	1/3+ 3100
REFRIGERANT DATA Condensing Unit Size (H.P.) Capacity (BTU per hour)* ELECTRICAL DATA Voltage (International)	1/3+ 3100 115/60/1 (220/50/1)
REFRIGERANT DATACondensing Unit Size (H.P.)Capacity (BTU per hour)*ELECTRICAL DATAVoltage (International)Total Amps (International)10 ft. Cord/Plug [attached]	1/3+ 3100 115/60/1 (220/50/1) 7.4 (5.3) Yes
REFRIGERANT DATACondensing Unit Size (H.P.)Capacity (BTU per hour)*ELECTRICAL DATAVoltage (International)Total Amps (International)10 ft. Cord/Plug [attached] (International)	1/3+ 3100 115/60/1 (220/50/1) 7.4 (5.3) Yes
REFRIGERANT DATACondensing Unit Size (H.P.)Capacity (BTU per hour)*ELECTRICAL DATAVoltage (International)Total Amps (International)10 ft. Cord/Plug [attached] (International)SHIPPING DATA	1/3+ 3100 115/60/1 (220/50/1) 7.4 (5.3) Yes (No)
REFRIGERANT DATACondensing Unit Size (H.P.)Capacity (BTU per hour)*ELECTRICAL DATAVoltage (International)Total Amps (International)10 ft. Cord/Plug [attached] (International)SHIPPING DATAWeight (pounds)	1/3+ 3100 115/60/1 (220/50/1) 7.4 (5.3) Yes (No) 451 (205 kg)
REFRIGERANT DATACondensing Unit Size (H.P.)Capacity (BTU per hour)*ELECTRICAL DATAVoltage (International)Total Amps (International)10 ft. Cord/Plug [attached] (International)SHIPPING DATAWeight (pounds)Height - Crated (inches)	1/3+ 3100 115/60/1 (220/50/1) 7.4 (5.3) Yes (No) 451 (205 kg) 43 3/4 (1111 mm)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.





Due to our continued efforts in developing innovative products, specifications subject to change without notice.







DESIGNED & ASSEMBLED IN THE U.S.A.

Toll-Free: 800-523-7138 Phone: 215-244-1400

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Fax: 215-244-9579

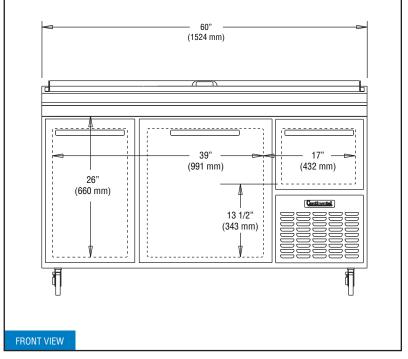

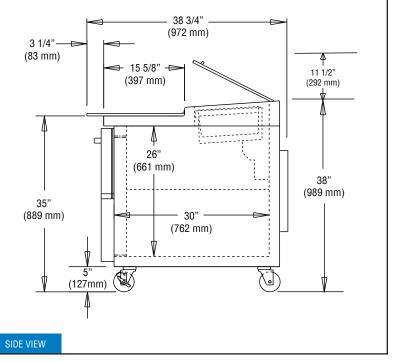

IMPORTANT NOTE: If the cabinet is located directly against a wall, a minimum clearance of 3" is required on sides, front and rear.