BASE MODEL SANDWICH UNIT

Model: RA68N12M-D

Natural Refrigerant R-290 Model

68" Mighty Top Sandwich Unit Refrigerator with Drawers - 12 Pans

Heavy gauge #300 series stainless steel top, stainless steel front and end panels, galvanized steel rear and grills and aluminum interior.



Options and Accessories

| (upcharge and lead times may apply) | | |
|-------------------------------------|---|--|
| Stainless steel interior | Flat lid | |
| Stainless steel back | Vision panel lid | |
| Overshelves (single or double) | Door & drawer locks | |
| Adjustable legs | Front breathing | |
| Rear mounted cutting board | Compressor left (standard on right) | |
| Composite cutting board | Drawer in lieu of door section above the condensing unit* | |

Consult factory for other model configurations, options and accessories. *Drawer section above condensing unit holds (1) 12 x 20 x 6 pan.

| Project Name: | | |
|------------------|-----------|--|
| Model Specified: | | |
| Location: | | |
| Item No: | Quantity: | |
| AIA #: | SIS #: | |

Standard Model Features

REFRIGERATION SYSTEM

Performance rated refrigeration system Natural, environmentally safe, high efficiency R-290 refrigerant¹ Unique forced air design utilizes fans (approx. every 12") across the entire back of unit for even distribution of cold Automatic, hot gas condensate evaporator Non-corrosive, plasticized fin evaporator coil Easily serviceable, slide out condensing unit Expansion valve system

CABINET ARCHITECTURE

| 2" non-CFC polyurethane foam insulation | | |
|---|--|--|
| Smooth, polished chrome door & drawer handles | | |
| Spring loaded, self closing door over condensing unit | | |
| Magnetic snap in Santoprene™ door gaskets | | |
| Stainless steel roll out drawers | | |
| 10" deep, full length nylon cutting board | | |
| Insulated lid | | |
| 5" casters | | |

MODEL FEATURES

Refrigerated section with door above the condensing unit

(12) 1/6 size recessed pans, 4" deep

Electronic control, off-cycle defrost

Field rehingeable door over condensing unit

¹ R-290 refrigerant meets all federal and state regulatory requirements.

NOTE: Models come standard with a door above the condensing unit. A drawer above the condensing unit is an option.





APPROVAL:

Model Specifications


| DIMENSIONAL DATA | |
|--|---------------------|
| Net Capacity (cubic feet) | 22 (623 cu l) |
| 1/6 Size Pans (4" deep) | 12 |
| Width, Overall (inches) | 68 (1727 mm) |
| Depth, Overall (inches) (including handles & bumpers) | 37 (940 mm) |
| Depth, Cutting Board (inches) | 10 (254 mm) |
| Height, Overall (inches) (including 5" casters) | 42 (1067 mm) |
| Number of Drawers | 4 |
| Number of Half Doors | 1 |
| Interior Depth (inches) (above condenser) | 30 (762 mm) |
| Interior Height (inches) (above condenser) | 12 1/2 (318 mm) |
| Interior Width (inches) (above condenser) | 17 (432 mm) |
| REFRIGERANT DATA | |
| Condensing Unit Size (H.P.) | 1/3+ |
| Capacity (BTU per hour)* | 2600 |
| ELECTRICAL DATA | |
| Voltage (International) | 115/60/1 (220/50/1) |
| Total Amps (International) | 5.8 (3.9) |
| 10 ft. Cord/Plug [attached] (International) | Yes (No) |
| SHIPPING DATA | |
| Weight (pounds) | 490 (222 kg) |
| Height - Crated (inches) | 43 3/4 (1111 mm) |
| Width - Crated (inches) | 70 (1778 mm) |
| Depth - Crated (inches) | 47 (1194 mm) |
| DRAWER PAN CONFIGURATIONS | |


Two Tier: (1) $12 \times 20 \times 6$ pan & (3) $1/6 \times 6$ pans (top) (2) $12 \times 20 \times 6$ pans (bottom) (supplied by others)


* Rating @ +25°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Model Plan Views

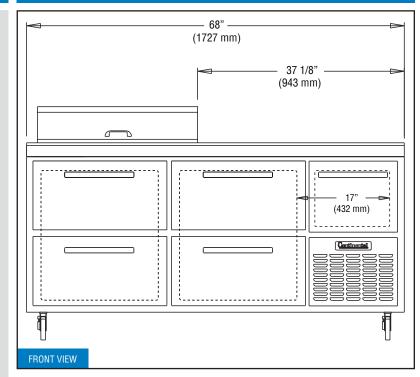

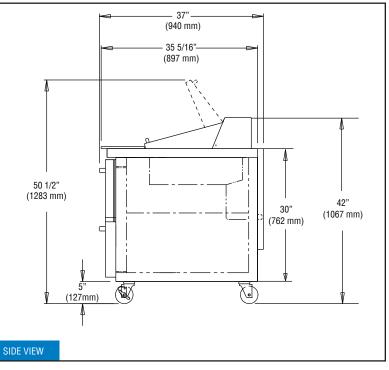

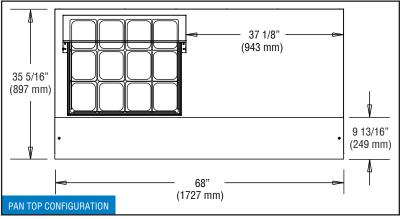

REVISED: 3/8/24