WORKTOP REFRIGERATOR

Model: SW48N-FB

Natural Refrigerant R-290 Model

48" Worktop Refrigerator with Solid Doors - Front Breathing

ENERGY STAR[®] Qualified Commercial Refrigerator

Stainless steel front, top and end panels, aluminum back and interior.



Options and Accessories

(upcharge and lead times may apply)		
Door locks		
Drawers in lieu of door (consult factory)**		
Special electrical requirements (consult factory)		

****Two Tier**: (1) 12 x 18 x 6 pan per drawer or (1) 1/2 size x 6 & (1) 1/3 x 6 pans per drawer

Consult factory for other model configurations, options and accessories.





Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance rated refrigeration system
Natural, environmentally safe, high efficiency R-290 refrigerant ¹
Automatic, hot gas condensate evaporator
Non-corrosive, plasticized fin evaporator coil
Easily serviceable, back mounted compressor

CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation
Smooth, polished chrome door handles
Spring loaded, self closing doors
Magnetic snap in Santoprene™ door gaskets
Heavy duty, epoxy coated steel shelves
Completely enclosed, vented and removable case back
3 3/4" casters

MODEL FEATURES

Electronic control, off cycle defrost Field rehingeable doors

¹ R-290 refrigerant meets all federal and state regulatory requirements.

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space.

APPROVAL:

Model Specifications

DIMENSIONAL DATA 13.4 (379 cu l) Net Capacity (cubic feet) 48 (1219 mm) Width, Overall (inches) Depth, Overall (inches) 32 3/16 (818 mm) (including handles & bumpers) Height, Overall (inches) 34 (864 mm) (including 3 3/4" casters) Shelf Area (square feet) 6.8 (0.6 sq m) Number of Shelves 2 2 Number of Doors Interior Depth (inches) See Drawing Interior Height (inches) 26 1/4 (667 mm) 44 (1118 mm) Interior Width (inches)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/5
Capacity (BTU per hour)*	1625

ELECTRICAL DATA


Voltage (International)	115/60/1 (220/50/1)
Total Amps (International)	2.5 (2.2)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Weight (pounds)	281 (128 kg)
Height - Crated (inches)	42 (1067 mm)
Width - Crated (inches)	56 (1422 mm)
Depth - Crated (inches)	37 1/4 (946 mm)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit





Due to our continued efforts in developing innovative products, specifications subject to change without notice.






DESIGNED & ASSEMBLED IN THE U.S.A.


Toll-Free: 800-523-7138 Phone: 215-244-1400

www.continentalrefrigerator.com

Fax: 215-244-9579 539 Dunksferry Road Bensalem, PA 19020

Model Plan Views

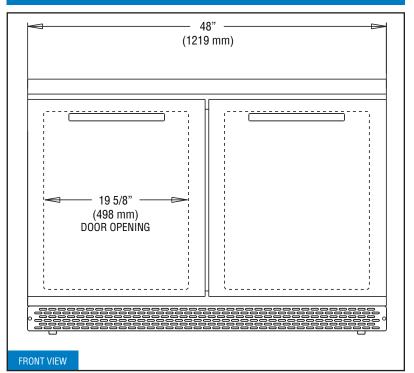

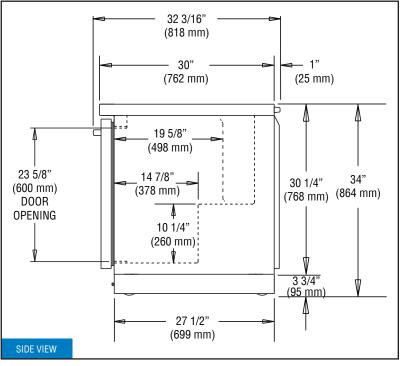

NOTE: For proper operation, the area under and in front of the cabinet must not be obstructed in any way.

© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.