SANDWICH UNIT REFRIGERATOR

Model: SW72N30M-HGL-FB

Natural Refrigerant R-290 Model

72" Mighty Top Sandwich Unit Refrigerator with Solid Doors and Hinged Glass Lid - 30 Pans - Front Breathing

Stainless steel front, top and end panels, aluminum back and interior.



Options and Accessories

(upcharge and lead times may apply)		
Stainless steel interior	Composite cutting board	
Stainless steel back	Crumb catcher	
Additional epoxy coated steel shelves	Door locks	
Stainless steel shelves	Drawers in lieu of door(s)	

Consult factory for other model configurations, options and accessories. **Two tier: (1) 1/2 size x 6 & (1) 1/3 x 6 pans per drawer





Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Performance rated refrigeration system
Natural, environmentally safe, high efficiency R-290 refrigerant ¹
Unique air flow distribution allows pan product to maintain 33° - 41°F
Automatic, hot gas condensate evaporator
Non-corrosive, plasticized fin evaporator coil
Expansion valve system
Easily serviceable, back mounted compressor
CABINET ARCHITECTURE
2" non-CFC polyurethane foam insulation
Smooth, polished chrome door handles
Spring loaded, self closing doors
Magnetic snap in Santoprene™ door gaskets
Heavy duty, epoxy coated steel shelves
8" deep, full length nylon cutting board
Energy efficient, 2 pane, low emissivity glass lid
Aluminum glass frame with satin finish
Concealed lid hinges
Integral stainless steel gas spring lid supports
Completely enclosed, vented and removable case back
3 3/4" casters
MODEL FEATURES
(30) $1/6$ size recessed pans, 4" deep
Removable interior tub below pans
Electronic control, off-cycle defrost
Field rehingeable doors

¹ R-290 refrigerant meets all federal and state regulatory requirements.

Front breathers are a unique, field assembled, bottom mounted ventilation system designed to allow cabinets to be flush against a wall or built into a counter to conserve space. For proper operation, the area under and in front of the cabinet <u>must</u> not be obstructed in any way.

APPROVAL:

Model Specifications

DIMENSIONAL DATA Net Capacity (cubic feet) 20.6 (583 cu l) 30 1/6 Size Pans (4" deep) Width, Overall (inches) 72 (1829 mm) Depth, Overall (inches) 35 (889 mm) (including top, cutting board & bumpers) Depth, Cutting Board (inches) 8 (203 mm) Height, Overall (inches) 35 9/16 (935 mm) (including 5" casters) Shelf Area (square feet) 10.2 (0.9 sq m) Number of Shelves 3 Number of Doors 3 See Drawing Interior Depth (inches) Interior Height (inches) 26 1/4 (667 mm) 68 (1727 mm) Interior Width (inches)

REFRIGERANT DATA

Condensing Unit Size (H.P.)	1/3+
Capacity (BTU per hour)*	2560

ELECTRICAL DATA


Voltage (International)	115/60/1 (220/50/1)
Total Amps (International)	6.0 (3.6)
10 ft. Cord/Plug [attached] (International)	Yes (No)

SHIPPING DATA

Weight (pounds)	470 (213 kg)
Height - Crated (inches)	43 1/4 (1099 mm)
Width - Crated (inches)	80 (2032 mm)
Depth - Crated (inches)	37 1/4 (946 mm)

* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

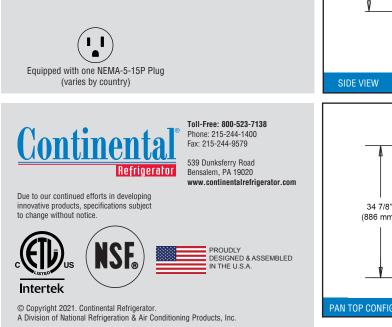

Model Plan Views

