
## WORKTOP FREEZER (0°F)

## **Model: SWF48NBS**

Natural Refrigerant R-290 Model

## 48" Worktop Freezer with Solid Doors and 5½" Backsplash

Stainless steel front, top and end panels, aluminum back and interior.

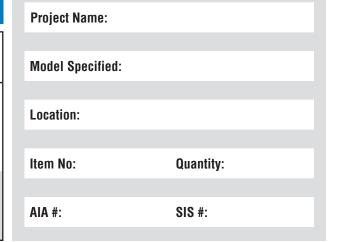



## **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel interior	Different caster sizes
Stainless steel back	Adjustable legs
Additional epoxy coated steel shelves	Door locks
Stainless steel shelves	Drawers in lieu of door (consult factory)**
Overshelves (single or double)	Special electrical requirements (consult factory)

\*\*Two Tier: (1) 12 x 18 x 6 pan per drawer or (1) 1/2 size x 6 & (1) 1/3 x 6 pans per drawer

## **Standard Model Features**

#### **REFRIGERATION SYSTEM**

Performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable, back mounted compressor

#### **CABINET ARCHITECTURE**

2" non-CFC polyurethane foam insulation

Smooth, polished chrome door handles

Spring loaded, self closing doors

Magnetic snap in Santoprene™ door gaskets

Heavy duty, epoxy coated steel shelves

Completely enclosed, vented and removable case back

5" casters

#### **MODEL FEATURES**

Field rehingeable doors

Electronic control, automatic electric defrost

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

Consult factory for other model configurations, options and accessories.





APPROVAL:

## **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cubic feet)	13.4 (379 cu I)
Width, Overall (inches)	48 (1219 mm)
Depth, Overall (inches) (including handles & bumpers)	32 3/16 (818 mm)
Height, Overall (inches) (including 5" casters)	40 3/4 (1035 mm)
Shelf Area (square feet)	6 0 (0 6 ag m)
Olieli Alea (Squale leet)	6.8 (0.6 sq m)
Number of Shelves	2
· · · /	( 1 /
Number of Shelves	2
Number of Shelves Number of Doors	2 2

#### **REFRIGERANT DATA**

Condensing Unit Size (H.P.)	1/2
Capacity (BTU per hour)*	2078

#### **ELECTRICAL DATA**

Voltage (International)	115/60/1 (220/50/1)
Total Amps (International)	7.7 (4.3)
Defrost Amps (International)	4.4 (2.5)
10 ft. Cord/Plug [attached] (International)	Yes (No)

#### **SHIPPING DATA**

Weight (pounds)	270 (123 kg)
Height - Crated (inches)	48 3/4 (1238 mm)
Width - Crated (inches)	56 (1422 mm)
Depth - Crated (inches)	37 1/4 (946 mm)

<sup>\*</sup> Rating @ -15°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)

# Continental® Refrigerator

**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

## **Model Plan Views**

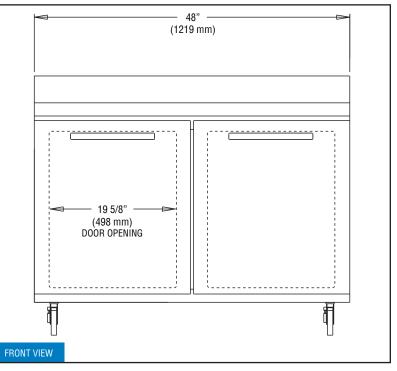

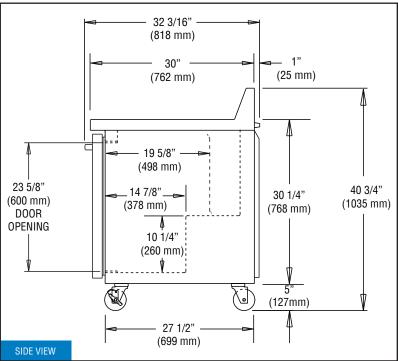

**IMPORTANT NOTE:** If the cabinet is located directly against a wall, a <u>minimum clearance of 3" is required on sides, front and rear.</u>